


MALUS
Stockholm Bench - Cast on site version
Casting instructions

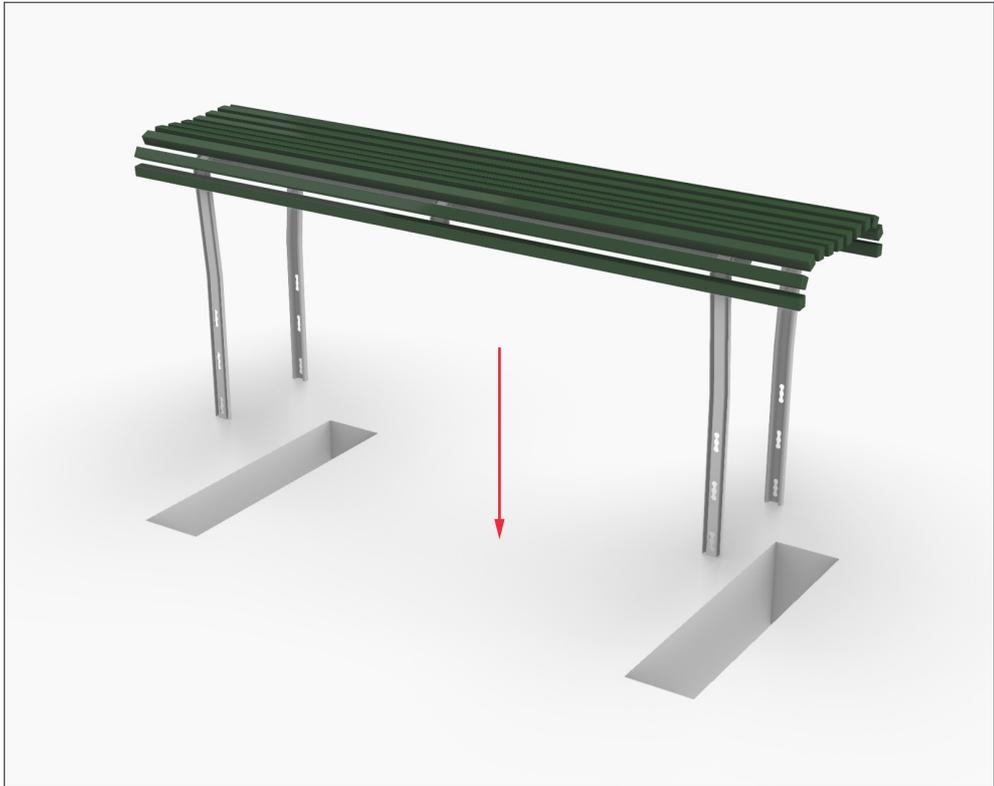


01.

Prepare 2 holes for casting the bench in the chosen position.

Minimum dimensions for each hole:
Width 20cm
Length 90cm
Depth 50cm


See illustration below.

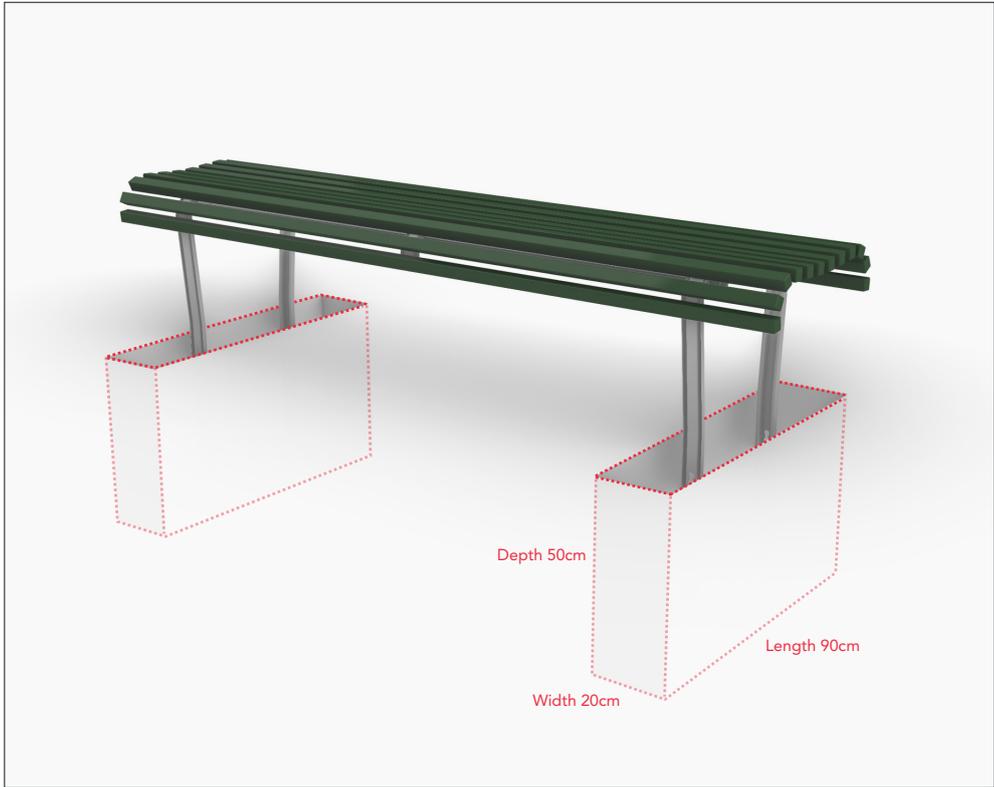

02.

Place the bench in the holes.

MALUS
Stockholm Bench - Cast on site version
Casting instructions

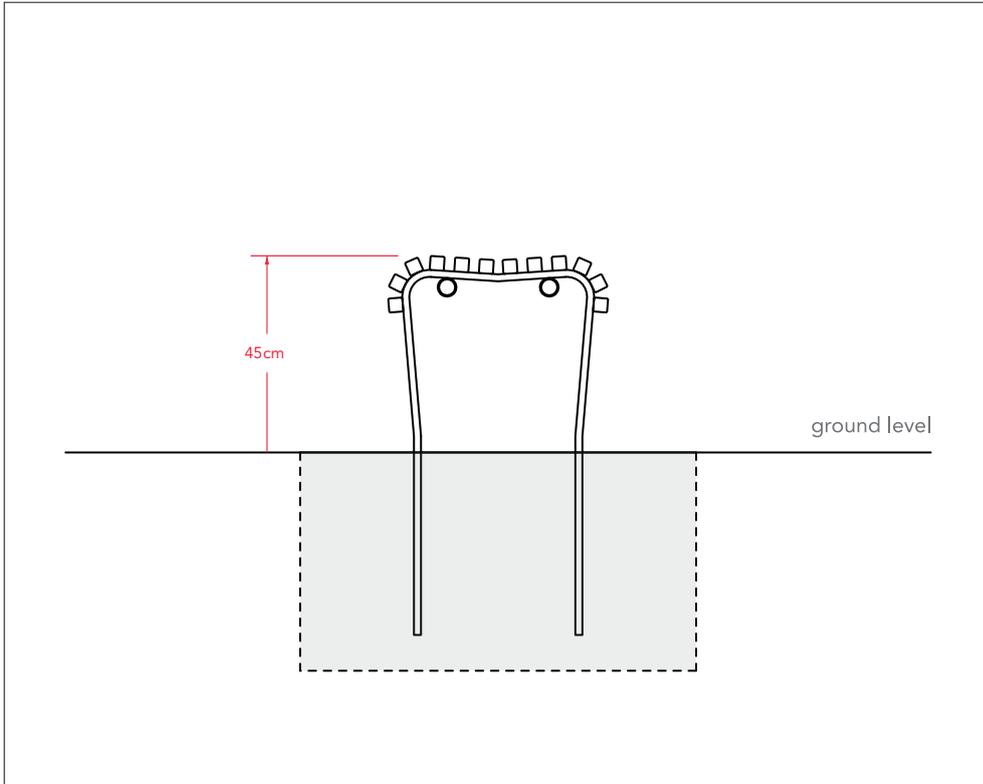

03.

Adjust the positioning of the bench and secure in place with (wooden) supports.

Make sure the seat is horizontal when viewing from the front. Viewed from the side as shown.

Important!
make sure the seat height is 45cm.



04.

Cast concrete in both holes. Remove supports after drying.

Level the holes with soil or the chosen top layer material.